




**Engineering progress
Enhancing lives**

Colorado School of Mines Weaver Tower

INSULPEX stars in replacement of outdated cooling system at prestigious engineering school dormitories. na.rehau.com/projects

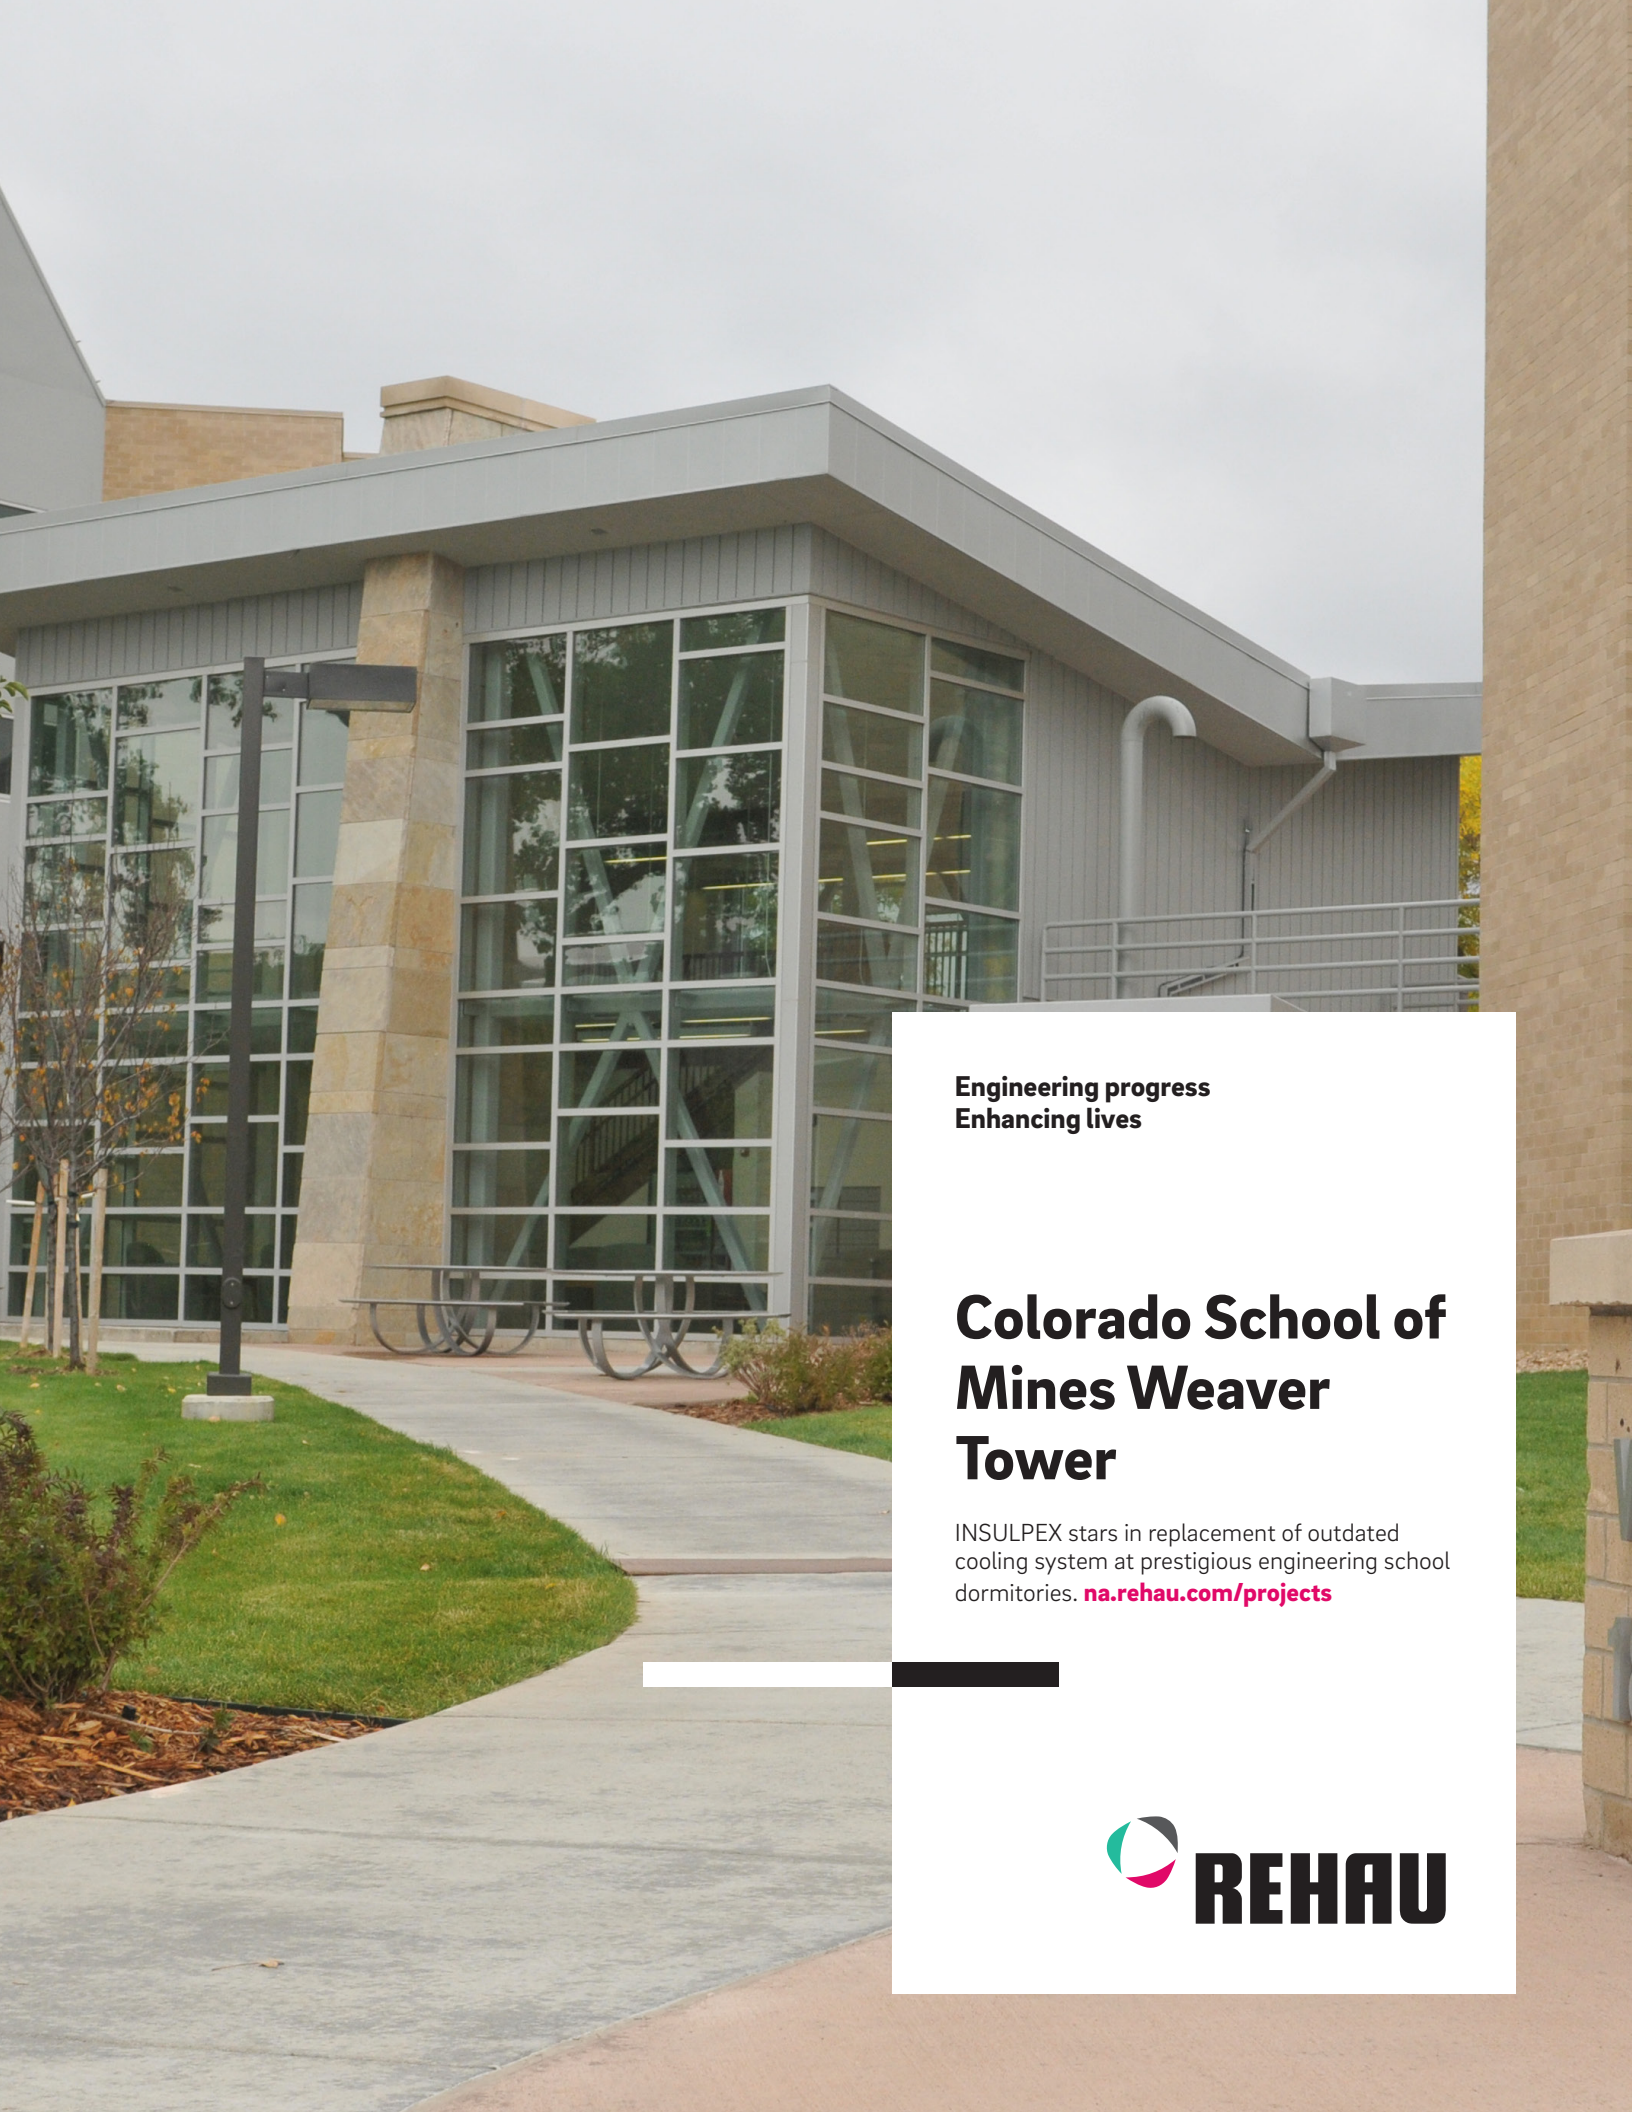

Energy transfer piping brings the cool to Colorado School of Mines' Weaver Towers

In 2011, an aging and outdated cooling system in the Colorado School of Mines' 230-student Weaver Towers dormitory was scheduled to be replaced. The stand-alone system had been maintained beyond its life expectancy, and the prestigious engineering school's mechanical operations team knew they needed to identify a reliable, long-term replacement cooling solution as quickly as possible.

The school consulted with REHAU technical associate Kenko Co., Inc. and Kevin Hale, a REHAU account manager who specializes in pre-insulated PEX piping systems, and with their help selected REHAU INSULPEX pre-insulated PEX piping as part of a complete redesign of the dorm's cooling system.

Instead of operating as an independent entity, the new cooling system used INSULPEX to bring chilled water from the university's central plant to the Weaver Towers dormitory.

The overall installed cost was considerably cheaper and easier than the alternative, which would have been to completely replace the old system's pipes with new steel," Hale said.

According to Hale, installing a rigid steel system would likely have required corrosion protection and time-demanding welding. Simple, flexible and available in long pipe lengths requiring minimal fittings, the REHAU INSULPEX system was an ideal alternative to this, and also provided the long-term durability necessary for the project.

"The school wanted a piping solution that would last, and would be easy to install," said Hale. "INSULPEX was able to meet both these demands, particularly because it is a flexible, insulated PEXa-based product with exceptional durability."

Rick Cuba, U.S. Engineering general plumbing foreman and installer on the project, was able to experience the benefits of the REHAU PEXa-based system for the first time on the Weaver Towers job.

The flexible nature of the INSULPEX pipe provided considerable time savings and facilitated a smooth overall installation. "It worked out just great," said Cuba, "and we were able to complete the job in only two days. It would have taken three or four weeks to do it with steel."

To create supply and return lines to and from the university's central chiller plant, Cuba's team installed two 292 ft (89 m) runs of 4 in. INSULPEX in an underground trench between the Weaver Towers dorm and a utility tunnel. At the end of the tunnel, they also tied the new piping into the plant's chilled water distribution system.

"Installing INSULPEX was terrifically simple," Cuba said. "We dug the ditch, unrolled the pipe, backfilled it and connected it to the vault. No welding, no insulating, no corrosion protecting steps necessary."

Based on his experience with the Colorado School of Mines Weaver Towers project and other recent work, Cuba and U.S. Engineering have specified the REHAU INSULPEX piping system for several current and future projects. "We're using INSULPEX on a retrofit condominium complex project and a new-construction hospital project," Cuba said.



Project: Colorado School of Mines, Golden, CO
Construction type: Educational facility, opened in 2011
Project scope: 584 ft (178 m) of INSULPEX pipe
Engineer: U.S. Engineering
REHAU systems used: INSULPEX® Pre-insulated PEXa piping

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2023 REHAU 855.924 06.2023