



**Engineering progress
Enhancing lives**

RAUSILENTO

English edition, valid from 01.04.2022



Contents


01	RAUSILENTO	05
01.01	RAUSILENTO drainpipe	07
01.02	RAUSILENTO fitting	09
01.03	Fastening technology	18
01.04	Fire protection	19
01.05	Accessories	20
02	Index of articles	23

01.01 RAUSILENTO drainpipe**RAUSILENTO Pipe**

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

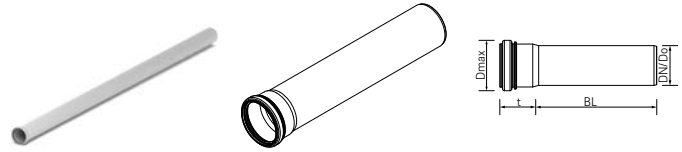

Mat.-no.	Description	DN/OD	BL mm	D _{max} mm	t mm	Weight	PG pc	PG pc
15572011001	DN/OD 32 / 150 mm	32	150	43	35.5	0.042 kg/pc	20	900
15572021001	DN/OD 32 / 250 mm	32	250	43	35.5	0.063 kg/pc	20	900
15535011001	DN 32 / 500 mm	32	500	43	35.5	0.137 kg/pc	20	480
15535021001	DN 32 / 1000 mm	32	1000	43	35.5	0.269 kg/pc	10	600
15535031001	DN 32 / 2000 mm	32	2000	43	35.5	0.497 kg/pc	10	600
15572031001	DN/OD 40 / 150 mm	40	150	54	39.3	68.5 g/pc	20	900
15572041001	DN/OD 40 / 250 mm	40	250	54	39.3	97.5 g/pc	20	900
15535041001	DN 40 / 500 mm	40	500	54	39.3	0.171 kg/pc	20	480
15535051001	DN 40 / 1000 mm	40	1000	54	39.3	0.32 kg/pc	30	600
15535061001	DN 40 / 2000 mm	40	2000	54	39.3	0.602 kg/pc	10	600
15535071001	DN 40 / 3000 mm	40	3000	54	39.3	1.1 kg/pc	10	600
15572051001	DN/OD 50 / 150 mm	50	150	64	41.3	91.75 g/pc	20	900
15572061001	DN/OD 50 / 250 mm	50	250	64	41.3	135.1 g/pc	20	540
15535081001	DN 50 / 500 mm	50	500	64	41.3	0.219 kg/pc	20	400
15535091001	DN 50 / 1000 mm	50	1000	64	41.3	0.407 kg/pc	10	400
15535111001	DN 50 / 1500 mm	50	1500	64	41.3	0.595 kg/pc	10	400
15535121001	DN 50 / 2000 mm	50	2000	64	41.3	0.783 kg/pc	10	400
15535131001	DN 50 / 3000 mm	50	3000	64	41.3	1.16 kg/pc	10	400
15572071001	DN/OD 75 / 150 mm	75	150	98	46.3	137 g/pc	20	360
15572081001	DN/OD 75 / 250 mm	75	250	98	46.3	195 g/pc	20	240
15535141001	DN 75 / 500 mm	75	500	98	46.3	0.333 kg/pc	20	160
15535161001	DN 75 / 1000 mm	75	1000	98	46.3	0.654 kg/pc	10	210
15535171001	DN 75 / 1500 mm	75	1500	98	46.3	0.955 kg/pc	10	210
15535181001	DN 75 / 2000 mm	75	2000	98	46.3	1.254 kg/pc	10	210
15535191001	DN 75 / 3000 mm	75	3000	98	46.3	1.885 kg/pc	10	210
15572091001	DN/OD 90 / 150 mm	90	150	105	48.4	185 g/pc	20	240
15572101001	DN/OD 90 / 250 mm	90	250	105	48.4	264 g/pc	20	240
15535201001	DN 90 / 500 mm	90	500	105	48.4	0.498 kg/pc	10	120
15535211001	DN 90 / 1000 mm	90	1000	105	48.4	0.919 kg/pc	10	100
15535221001	DN 90 / 1500 mm	90	1500	105	48.4	1.34 kg/pc	10	100
15535231001	DN 90 / 2000 mm	90	2000	105	48.4	1.76 kg/pc	10	100
15535241001	DN 90 / 3000 mm	90	3000	105	48.4	2.602 kg/pc	10	100

Mat.-no.	Description	DN/OD	BL mm	D _{max} mm	t mm	Weight	PG pc	PG pc
15572111001	DN/OD 110 / 150 mm	110	150	127.4	51.6	279 g/pc	20	180
15572121001	DN/OD 110 / 250 mm	110	250	127.4	51.6	398.25 g/pc	20	120
15562231001	DN 110 / 500 mm	110	500	127.4	51.6	742.81 g/pc	12	96
15562241001	DN 110 / 1000 mm	110	1000	127.4	51.6	1.362 kg/pc	4	80
15562251001	DN 110 / 1500 mm	110	1500	127.4	51.6	1.982 kg/pc	4	80
15562261001	DN 110 / 2000 mm	110	2000	127.4	51.6	2.601 kg/pc	4	80
15562271001	DN 110 / 3000 mm	110	3000	127.4	51.6	3.84 kg/pc	4	80
15572131001	DN/OD 125 / 150 mm	125	150	146	60.4	361 g/pc	6	108
15572141001	DN/OD 125 / 250 mm	125	250	146	60.4	507 g/pc	10	90
15535301001	DN 125 / 500 mm	125	500	146	60.4	0.94 kg/pc	6	72
15535311001	DN 125 / 1000 mm	125	1000	146	60.4	1.726 kg/pc	8	64
15535321001	DN 125 / 2000 mm	125	2000	146	60.4	3.285 kg/pc	8	64
15535331001	DN 125 / 3000 mm	125	3000	146	60.4	4.852 kg/pc	8	64
15535341001	DN 160 / 500 mm	160	500	184	67.7	1.566 kg/pc	8	32
15535351001	DN 160 / 1000 mm	160	1000	184	67.7	2.81 kg/pc	6	48
15535361001	DN 160 / 2000 mm	160	2000	184	67.7	5.298 kg/pc	6	48
15535371001	DN 160 / 3000 mm	160	3000	184	67.7	7.766 kg/pc	6	48


01.02 RAUSILENTO fitting

RAUSILENTO bend

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

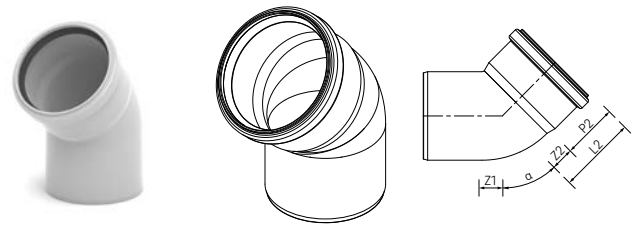

Mat.-no.	Description	α °	Z1 mm	Z2 mm	Weight	PG pc	PG pc
15572151001	DN/OD 32 / 15 degree	15	8	10	0.022 kg/pc	20	1440
15572231001	DN/OD 32 / 30 degree	30	8	11	0.022 kg/pc	20	1440
15572311001	DN/OD 32 / 45 degree	45	11	13	0.023 kg/pc	20	1440
15572461001	DN/OD 32 / 87 degree	87	22	25	0.027 kg/pc	20	1440
15572161001	DN/OD 40 / 15 degree	15	5	8	41.6 g/pc	20	1440
15572241001	DN/OD 40 / 30 degree	30	7	11	36.5 g/pc	20	1440
15572321001	DN/OD 40 / 45 degree	45	10	14	43.75 g/pc	20	1440
15572401001	DN/OD 40 / 67 degree	67	16	19	36 g/pc	20	800
15572471001	DN/OD 40 / 87 degree	87	23	26	47.5 g/pc	20	1440
15572171001	DN/OD 50 / 15 degree	15	5	9	54.7 g/pc	20	900
15572251001	DN/OD 50 / 30 degree	30	9	12	53.9 g/pc	20	900
15572331001	DN/OD 50 / 45 degree	45	12	16	58.5 g/pc	20	900
15572411001	DN/OD 50 / 67 degree	67	27	24	60.8 g/pc	20	900
15572481001	DN/OD 50 / 87 degree	87	28	31	65.68 g/pc	20	900
15572181001	DN/OD 75 / 15 degree	15	7	11	91 g/pc	20	360
15572261001	DN/OD 75 / 30 degree	30	12	15	97.35 g/pc	20	360
15572341001	DN/OD 75 / 45 degree	45	18	21	99.5 g/pc	20	540
15572421001	DN/OD 75 / 67 degree	67	28	31	111 g/pc	20	360
15572491001	DN/OD 75 / 87 degree	87	54	43	121 g/pc	20	360
15572191001	DN/OD 90 / 15 degree, thickened wall	15	7	12	123.75 g/pc	20	360
15572271001	DN/OD 90 / 30 degree, thickened wall	30	14	18	137 g/pc	20	360
15572351001	DN/OD 90 / 45 degree, thickened wall	45	21	25	146 g/pc	20	360
15572431001	DN/OD 90 / 67 degree, thickened wall	67	34	39	0.253 kg/pc	20	180
15572501001	DN/OD 90 / 87 degree, thickened wall	87	48	52	192.25 g/pc	20	240
15572201001	DN/OD 110 / 15 degree, thickened wall	15	9	14	204.5 g/pc	20	240
15572281001	DN/OD 110 / 30 degree, thickened wall	30	17	21	229 g/pc	20	160
15572361001	DN/OD 110 / 45 degree, thickened wall	45	25	29	248.5 g/pc	20	160
15572441001	DN/OD 110 / 67 degree, thickened wall	67	40	44	284 g/pc	20	180
15572511001	DN/OD 110 / 87 degree, thickened wall	87	57	61	333 g/pc	20	180
15572211001	DN/OD 125 / 15 degree, thickened wall	15	10	15	287 g/pc	20	180
15572291001	DN/OD 125 / 30 degree, thickened wall	30	19	23	315 g/pc	20	180
15572371001	DN/OD 125 / 45 degree, thickened wall	45	28	33	357 g/pc	20	120


Mat.-no.	Description	α °	Z1 mm	Z2 mm	Weight	PG pc	PG pc
15572451001	DN/OD 125 / 67 degree, thickened wall	67	46	50	418 g/pc	20	120
15572521001	DN/OD 125 / 87 degree, thickened wall	87	65	70	446 g/pc	20	120
15572221001	DN/OD 160 / 15 degree	15	12	19	680 g/pc	10	60
15572301001	DN/OD 160 / 30 degree	30	24	31	762 g/pc	10	60
15572381001	DN/OD 160 / 45 degree, thickened wall	45	38	42	604 g/pc	10	60
15572531001	DN/OD 160 / 87 degree, thickened wall	87	87	87	832 g/pc	10	60

RAUSILENTO Single branch

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

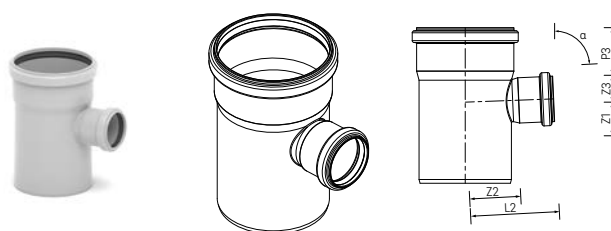


Mat.-no.	Description	α °	Z1 mm	Z2 mm	Z3 mm	Weight	PG pc	PG pc
15572541001	DN/OD 32 / 32 / 45 degree	45	15	48	49	0.047 kg/pc	20	900
15572551001	DN/OD 40 / 40 / 45 degree	45	10	49	49	79.5 g/pc	20	900
15572721001	DN/OD 40 / 40 / 87 degree	87	23	25	25	71.8 g/pc	20	900
15572561001	DN/OD 50 / 40 / 45 degree	45	8	61	60	79 g/pc	20	540
15572731001	DN/OD 50 / 40 / 87 degree	87	24	30	29	69 g/pc	20	540
15572571001	DN/OD 50 / 50 / 45 degree	45	12	61	61	107.05 g/pc	20	540
15572741001	DN/OD 50 / 50 / 87 degree	87	28	30	30	96.7 g/pc	20	540
15572581001	DN/OD 75 / 50 / 45 degree	45	-1	79	74	152 g/pc	20	360
15572751001	DN/OD 75 / 50 / 87 degree	87	27	43	31	136 g/pc	20	360
15572591001	DN/OD 75 / 75 / 45 degree	45	18	91	91	193 g/pc	20	240
15572761001	DN/OD 75 / 75 / 87 degree	87	40	43	43	170.5 g/pc	20	240
15572601001	DN/OD 90 / 50 / 45 degree	45	-8	90	83	194 g/pc	20	240
15572771001	DN/OD 90 / 50 / 87 degree	87	28	50	32	176 g/pc	20	240
15572611001	DN/OD 90 / 75 / 45 degree	45	11	102	100	239 g/pc	20	180
15572781001	DN/OD 90 / 75 / 87 degree	87	41	51	44	199 g/pc	20	180
15572621001	DN/OD 90 / 90 / 45 degree	45	21	110	110	300 g/pc	20	120
15572791001	DN/OD 90 / 90 / 87 degree, max flow	87	56	70	51	243 g/pc	20	180
15572631001	DN/OD 110 / 50 / 45 degree	45	-17	104	91	280 g/pc	20	180
15572801001	DN/OD 110 / 50 / 87 degree	87	38	60	32	268 g/pc	20	180
15572641001	DN/OD 110 / 75 / 45 degree	45	1	116	109	348 g/pc	20	120
15572811001	DN/OD 110 / 75 / 87 degree	87	40	60	45	348 g/pc	20	120
15572651001	DN/OD 110 / 90 / 45 degree	45	12	121	118	383 g/pc	20	120
15572821001	DN/OD 110 / 90 / 87 degree, max flow	87	68	81	48	357 g/pc	20	120
15572661001	DN/OD 110 / 110 / 45 degree	45	25	134	134	501 g/pc	20	120
15572831001	DN/OD 110 / 110 / 87 degree, max flow	87	73	78	58	429 g/pc	20	120
15572671001	DN/OD 125 / 110 / 45 degree	45	18	144	141	626 g/pc	10	60
15572841001	DN/OD 125 / 110 / 87 degree	87	58	69	63	500 g/pc	10	90
15572681001	DN/OD 125 / 125 / 45 degree	45	28	152	152	729 g/pc	10	60
15572851001	DN/OD 125 / 125 / 87 degree	87	65	70	70	576 g/pc	10	60
15572691001	DN/OD 160 / 110 / 45 degree	45	36	169	197	1.064 kg/pc	10	40
15572861001	DN/OD 160 / 110 / 87 degree	87	83	86	89	1.091 kg/pc	10	40
15572711001	DN/OD 160 / 160 / 45 degree	45	36	194	197	1.507 kg/pc	10	40
15572881001	DN/OD 160 / 160 / 87 degree	87	83	89	89	961 g/pc	10	40

RAUSILENTO Double branch

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

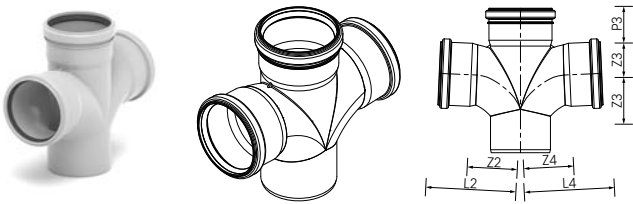


Mat.-no.	Description	Weight	PG	PG
		g/pc	pc	pc
15572891001	DN/OD 90 / 90 / 90 / 87 degree, max flow	335	10	90
15572901001	DN/OD 110 / 110 / 110 / 87 degree	498	20	100

RAUSILENTO Corner double branch

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

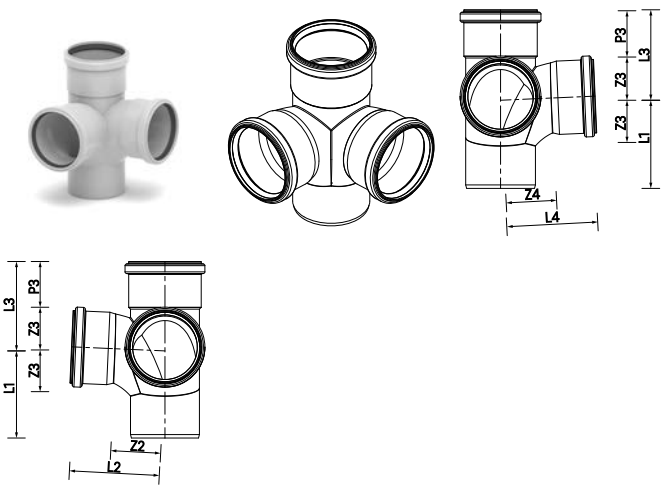


Mat.-no.	Description	Weight	PG	PG
			pc	pc
15572911001	DN/OD 90 / 90 / 90 / 87 degree, mf	0.4 kg/pc	10	90
15572921001	DN/OD 110 / 110 / 110 / 87 degree	516.2 g/pc	20	100

RAUSILENTO Reducer

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

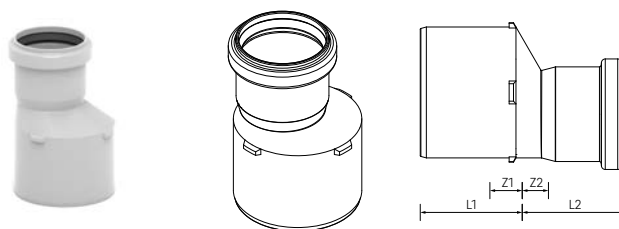


Mat.-no.	Description	Weight	PG pc	PG pc
15573001001	DN/OD 40 / 32	0.026 kg/pc	20	1440
15573011001	DN/OD 50 / 32	0.031 kg/pc	20	1440
15573021001	DN/OD 50 / 40	42.65 g/pc	20	1440
15573031001	DN/OD 75 / 50	71.1 g/pc	20	900
15573041001	DN/OD 90 / 75	94 g/pc	20	540
15573051001	DN/OD 110 / 50	150 g/pc	20	540
15573061001	DN/OD 110 / 75	142.33 g/pc	20	540
15573071001	DN/OD 110 / 90	157 g/pc	20	360
15573081001	DN/OD 125 / 110	233 g/pc	20	240
15573091001	DN/OD 160 / 125	450 g/pc	20	120

RAUSILENTO Short reducer

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

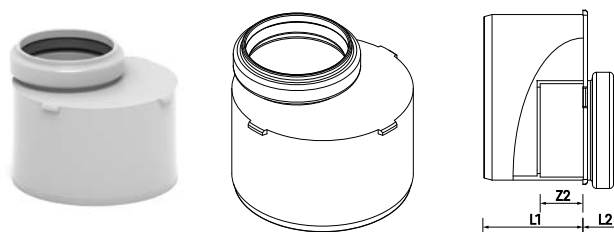

Mat.-no.	Description	Weight	PG pc	PG pc
15573101001	DN/OD 50 / 40	0.035 kg/pc	20	800
15573111001	DN/OD 75 / 50	58 g/pc	20	800
15573121001	DN/OD 90 / 50	0.088 kg/pc	20	800
15573131001	DN/OD 110 / 50	118 g/pc	20	480
15573141001	DN/OD 110 / 75	150 g/pc	20	480

RAUSILENTO Double socket

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)




Mat.-no.	Description	Weight	PG pc	PG pc
15573161001	DN/OD 32	0.021 kg/pc	20	1440
15573171001	DN/OD 40	41.5 g/pc	20	1440
15573181001	DN/OD 50	54 g/pc	20	1440
15573191001	DN/OD 75	93.8 g/pc	20	540
15573201001	DN/OD 90	121.6 g/pc	20	480
15573211001	DN/OD 110	203 g/pc	20	240
15573221001	DN/OD 125	291 g/pc	10	180
15573231001	DN/OD 160	615 g/pc	10	60

RAUSILENTO Slip-on socket

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

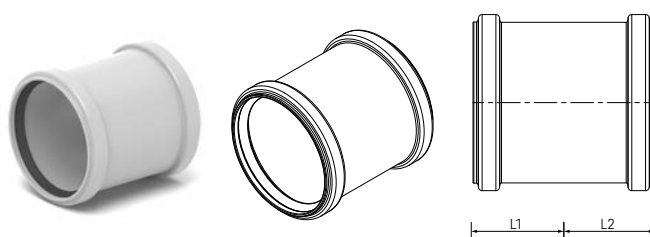


Mat.-no.	Description	Weight	PG pc	PG pc
15573241001	DN/OD 32	0.021 kg/pc	20	1440
15573251001	DN/OD 40	41.5 g/pc	20	1440
15573261001	DN/OD 50	54 g/pc	20	1440
15573271001	DN/OD 75	92.1 g/pc	20	540
15573281001	DN/OD 90	170 g/pc	20	480
15573291001	DN/OD 110	197 g/pc	20	240
15573301001	DN/OD 125	292 g/pc	10	180
15573311001	DN/OD 160	607 g/pc	10	60

RAUSILENTO Long socket

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

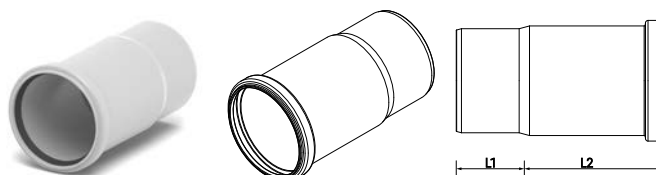


Mat.-no.	Description	Weight g/pc	PG pc	PG pc
15573321001	DN/OD 50	68	20	900
15573331001	DN/OD 75	113	20	320
15573341001	DN/OD 90	156.6	20	360
15573351001	DN/OD 110	262	20	180

RAUSILENTO Access pipe

Properties:
with push-fit socket and rubber sealing ring

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

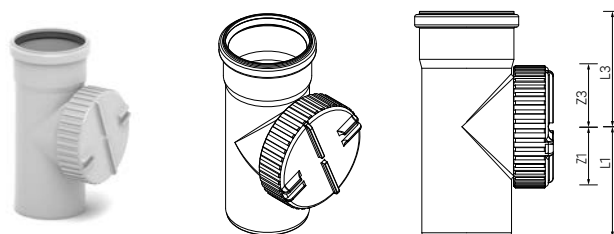

Mat.-no.	Description	Weight g/pc	PG pc	PG pc
15573371001	DN/OD 75	233	20	360
15573381001	DN/OD 90	309	20	180
15573391001	DN/OD 110	577	20	120
15573401001	DN/OD 125	643.5	20	100
15573411001	DN/OD 160	844	10	40


RAUSILENTO Connection bend

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
grey (RAL 7047)

Note:

- suitable rubber nipple Mat.-No. 11262531002
- suitable rubber nipple Mat.-No. 11219131003
- Prices without rubber nipple

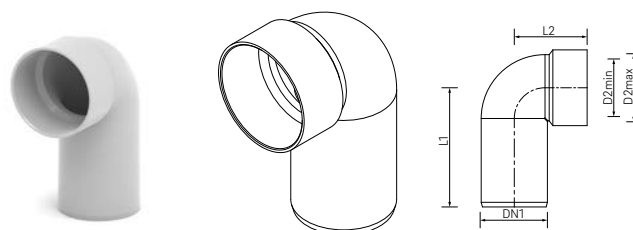

Mat.-no.	Description	Weight	PG pc	PG pc
15573421001	DN/OD 40 / 40-30	42.95 g/pc	20	1440
15573531001	DN/OD 50 / 40 - 30	0.052 kg/pc	20	960
15573441001	DN/OD 50 / 50	53 g/pc	20	900


RAUSILENTO Connection pipe

Material:
Polypropylene (PP)

Colour:
grey (RAL 7047)

Note:

- suitable rubber nipple Mat.-No. 11262531002
- suitable rubber nipple Mat.-No. 11219131003





Mat.-no.	Description	Weight g/pc	PG pc	PG pc
15573151001	DN/OD 50 / 40 - 30	19.5	20	2400

RAUSILENTO Socket plug

Material:
Polypropylene (PP)

Colour:
grey (RAL 7047)




Mat.-no.	Description	DN/OD	Z1 mm	Weight	PG pc	PG pc
15573451001	DN/OD 32	32	35	0.01 kg/pc	20	2400
15573461001	DN/OD 40	40	33	15 g/pc	20	2400
15573471001	DN/OD 50	50	34	20 g/pc	20	2400
15573481001	DN/OD 75	75	35	36 g/pc	20	1440
15573491001	DN/OD 90	90	37	51.7 g/pc	20	900
15573501001	DN/OD 110	110	37	89.8 g/pc	20	900
15573511001	DN/OD 125	125	40	100 g/pc	20	540
15573521001	DN/OD 160	160	49	282 g/pc	10	270

Socket plug securing clip

Application:
to secure the socket plug

Material:
galvanized steel

Note:
end cap not included




Mat.-no.	Description	Weight g/pc	PG pc	PG pc
11230001001	DN/OD 110	226	5	675
11230021001	DN/OD 160	295	5	600

Closet bend

Properties:
with lip-seal

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
white

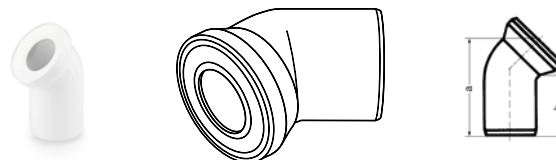


Mat.-no.	Description	α °	a mm	b mm	Weight g/pc	PG pc	PG pc
11216041001	DN/OD 110, 22 degree	22	165	150	275	20	240
11216141001	DN/OD 110, 45 degree	45	205	135	333.3	18	216
11216241001	DN/OD 110, 90 degree	90	230	160	391	14	168

REHAU Closet connection

Properties:
with lip-seal

Material:
Polypropylene, mineral reinforced (RAU-PP)

Colour:
white

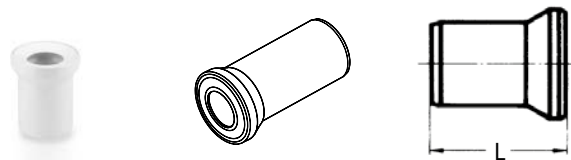

Mat.-no.	Description	length mm	Weight g/pc	PG pc	PG pc
11229341001	DN/OD 90, length 250 mm	250	260	10	150
11216341001	DN/OD 110, length 150 mm	150	244	26	312
11216441001	DN/OD 110, length 250 mm	250	296	16	192

01.03 Fastening technology

Fixing/security clamp

Properties:


- with acoustic liner
- with fixing nut with combination thread

Material:

galvanized steel

Note:

- DN 40 to DN 160 order hanger bolts separately
- DN 75 to DN 160 with quick fastener
- dimension DN 200: without quick fastener, incl. threaded screw M 12/60 mm and wall panel



Mat.-no.	Description	Weight g/pc	PG pc	PG pc
11226441001	DN/OD 40, screw closure, connect. M8/M10	80	25	4550
11205041001	DN/OD 50, screw closure, connect. M8/M10	92.5	25	4550
11200261002	DN/OD 75, snap-on clip, connect. M8/M10	233.7	10	1050
11200471002	DN/OD 90, snap-on clip, connect. M8/M10	287	10	900
11200291002	DN/OD 110, snap-on clip, M8/M10	342	10	720
11200481002	DN/OD 125, snap-on clip, M8/M10	385.1	10	720
11200491003	DN/OD 160, snap-on clip, connect. M10/M12	423.5	10	240

Guiding clamp

Properties:


- with acoustic liner
- with fixing nut with combination thread

Material:

galvanized steel

Note:

- DN 40 to DN 160 order hanger bolts separately
- DN 75 to DN 160 with quick fastener
- DN/OD 200 without quick fastener, incl. threaded screw M12/60 mm and wall panel




Mat.-no.	Description	Weight g/pc	PG pc	PG pc
11226541001	DN/OD 40, screw closure, connect M8	82	25	3250
11205341001	DN/OD 50, screw closure, connect. M8	93.5	25	1950
11200191002	DN/OD 75, snap-on clip, connect. M8/M10	244.1	10	1050
11200551002	DN/OD 90, snap-on clip, connect. M8/M10	298.7	10	900
11200271002	DN/OD 110, snap-on clip, M8/M10	355.3	10	720
11200561002	DN/OD 125, snap-on clip, M8/M10	399.2	10	720
11200571002	DN/OD 160, snap-on clip, M10/M12	440.2	10	240

Headless screw

Application:
for fixing-/guiding clamp

Material:
galvanized steel



Mat.-no.	Description	Length L mm	Weight g/pc	PG pc	PG pc
11210741002	connection M8, length 80 mm	80	22.2	100	12000
11210841002	connection M10, length 100 mm	100	46	100	6000

01.04 Fire protection

REHAU Fireproofing collar FP 3

Application:

- for surface mounting on the ceiling, on the wall
- in conjunction with RAUPIANO PLUS pipe
- in conjunction with RAUSILENTO pipe

Approval:

- ETA-17/0459
- CE mark

Material:


powder-coated stainless steel / intumescent inlay

Colour:

Blue

Note:

including fixing material, mounting instructions and identification plate



Mat.-no.	Description	Weight g/pc	PG pc	PG pc
11220391001	DN/OD 32	110	1	48
11220421001	DN/OD 40	140	1	48
11220451001	DN/OD 50	160	1	48
11220461001	DN/OD 75	240	1	48
11220471001	DN/OD 90	300	1	48
11220481001	DN/OD 110	330	1	48
11220491001	DN/OD 125	390	1	48
11220521001	DN/OD 160	590	1	48

REHAU Fireproofing collar FP 6

Application:

- für die Montage unter der Decke / in der Decke / an der Wand / in der Wand / an Schrägrohre in Verbindung
- in conjunction with RAUPIANO PLUS pipe
- in conjunction with RAUSILENTO pipe

Approval:

- ETA-17/0459
- CE mark

Material:


powder-coated stainless steel / intumescent inlay

Colour:

Blue

Note:

including fixing material, mounting instructions and identification plate



Mat.-no.	Description	Weight	PG pc	PG pc
11220551001	DN/OD 50	260 g/pc	28	280
11220561001	DN/OD 75	430 g/pc	28	280
11220571001	DN/OD 90	500 g/pc	28	280
11220581001	DN/OD 110	560 g/pc	28	280
11220591001	DN/OD 125	630 g/pc	28	280
11220621001	DN/OD 160	1.02 kg/pc	28	280

01.05 Accessories**Rubber nipple**

Application:


for connection pipe and connection bend

Material:

Styrene butadiene rubber (SBR)

Colour:

Black




Mat.-no.	Description	d _a mm	connection range	Weight g/pc	PG pc	PG pc
11262531002	DN/OD 50/40-30, for connection pipe/bend	55	32-40	25	20	2000
11219131003	DN/OD 50/50, for connection pipe/bend	68	47-50	37	400	4400

Rubber nipple with bead

Application:
for standard pipes and fittings

Material:
Styrene butadiene rubber (SBR)

Colour:
Black




Mat.-no.	Description	d _a mm	Weight g/pc	PG pc	PG pc
11229231003	DN/OD 40/30	40.5	16	20	10000
11229331003	DN/OD 50/30	50.5	37	20	700
11229431003	DN/OD 50/40	50.5	24	20	7000

Rubber sealing ring EPDM

Application:
for pipes and fittings

Material:
Ethylene-propylene diene monomer rubber (EPDM)

Colour:
Black



Mat.-no.	Description	Weight g/pc	PG pc	PG pc
11201081001	DN/OD 32	4.5	20	100
11200891001	DN/OD 40	4.5	20	100
11200951001	DN/OD 50	7	20	100
11200961001	DN/OD 75	9	20	100
11200971001	DN/OD 90	14	20	100
11200991001	DN/OD 110	18	20	100
11201051001	DN/OD 125	27	10	100
11201061001	DN/OD 160	45	10	100

Lubricant

Application:
for socket coupler connection



Mat.-no.	Description	Volume ml	Weight g/pc	PG pc	PG pc
11280011001	250 ml, for push-fit connection	250	284	42	1680
11280021001	500 ml, for push-fit connection	500	534	20	880



02 Index of articles

overview of all products

Mat.-no.	Description	Page
11200191002	REHAU Guiding clamp	DN/OD 75, snap-on clip, connect. M8/M10 18
11200261002	REHAU Fixing/security clamp	DN/OD 75, snap-on clip, connect. M8/M10 18
11200271002	REHAU Guiding clamp	DN/OD 110, snap-on clip, M8/M10 18
11200291002	REHAU Fixing/security clamp	DN/OD 110, snap-on clip, M8/M10 18
11200471002	REHAU Fixing/security clamp	DN/OD 90, snap-on clip, connect. M8/M10 18
11200481002	REHAU Fixing/security clamp	DN/OD 125, snap-on clip, M8/M10 18
11200491003	REHAU Fixing/security clamp	DN/OD 160, snap-on clip,connect. M10/M12 18
11200551002	REHAU Guiding clamp	DN/OD 90, snap-on clip, connect. M8/M10 18
11200561002	REHAU Guiding clamp	DN/OD 125, snap-on clip, M8/M10 18
11200571002	REHAU guiding clamp	DN/OD 160, snap-on clip, M10/M12 18
11200891001	REHAU Rubber sealing ring EPDM	DN/OD 40 21
11200951001	REHAU Rubber sealing ring EPDM	DN/OD 50 21
11200961001	REHAU Rubber sealing ring EPDM	DN/OD 75 21
11200971001	REHAU Rubber sealing ring EPDM	DN/OD 90 21
11200991001	REHAU Rubber sealing ring EPDM	DN/OD 110 21
11201051001	REHAU Rubber sealing ring EPDM	DN/OD 125 21
11201061001	REHAU Rubber sealing ring EPDM	DN/OD 160 21
11201081001	REHAU Rubber sealing ring EPDM	DN/OD 32 21
11205041001	REHAU Fixing/security clamp	DN/OD 50, screw closure, connect. M8/M10 18
11205341001	REHAU Guiding clamp	DN/OD 50, screw closure, connect. M8 18
11210741002	REHAU Headless screw	connection M8, length 80 mm 19
11210841002	REHAU Headless screw	connection M10, length 100 mm 19
11216041001	RAUPIANO PLUS Closet bend	DN/OD 110, 22 degree 17
11216141001	RAUPIANO PLUS Closet bend	DN/OD 110, 45 degree 17
11216241001	RAUPIANO PLUS Closet bend	DN/OD 110, 90 degree 17
11216341001	RAUPIANO PLUS Closet connection	DN/OD 110, length 150 mm 17
11216441001	RAUPIANO PLUS Closet connection	DN/OD 110, length 250 mm 17
11219131003	REHAU Rubber nipple	DN/OD 50/50, for connection pipe/bend 20
11220391001	REHAU Fireproofing collar FP3	DN/OD 32 19
11220421001	REHAU Fireproofing collar FP3	DN/OD 40 19
11220451001	REHAU Fireproofing collar FP3	DN/OD 50 19
11220461001	REHAU Fireproofing collar FP3	DN/OD 75 19
11220471001	REHAU Fireproofing collar FP3	DN/OD 90 19
11220481001	REHAU Fireproofing collar FP3	DN/OD 110 19
11220491001	REHAU Fireproofing collar FP3	DN/OD 125 19
11220521001	REHAU Fireproofing collar FP3	DN/OD 160 19
11220551001	REHAU Fireproofing collar FP6	DN/OD 50 20
11220561001	REHAU Fireproofing collar FP6	DN/OD 75 20
11220571001	REHAU Fireproofing collar FP6	DN/OD 90 20
11220581001	REHAU Fireproofing collar FP6	DN/OD 110 20
11220591001	REHAU Fireproofing collar FP6	DN/OD 125 20
11220621001	REHAU Fireproofing collar FP6	DN/OD 160 20
11226441001	REHAU Fixing/security clamp	DN/OD 40, screw closure, connect. M8/M10 18
11226541001	REHAU Guiding clamp	DN/OD 40, screw closure, connect M8 18
11229231003	REHAU Rubber nipple with bead	DN/OD 40/30 21
11229331003	REHAU Rubber nipple with bead	DN/OD 50/30 21
11229341001	RAUPIANO PLUS Closet connection	DN/OD 90, length 250 mm 17
11229431003	REHAU Rubber nipple with bead	DN/OD 50/40 21
11230001001	REHAU Socket plug securing clip	DN/OD 110 16
11230021001	REHAU Socket plug securing clip	DN/OD 160 16
11262531002	REHAU Rubber nipple	DN/OD 50/40-30, for connection pipe/bend 20
11280011001	REHAU Lubricant	250 ml, for push-fit connection 22
11280021001	REHAU Lubricant	500 ml, for push-fit connection 22
15535011001	RAUSILENTO Pipe	DN 32 / 500 mm 07
15535021001	RAUSILENTO Pipe	DN 32 / 1000 mm 07
15535031001	RAUSILENTO Pipe	DN 32 / 2000 mm 07
15535041001	RAUSILENTO Pipe	DN 40 / 500 mm 07
15535051001	RAUSILENTO Pipe	DN 40 / 1000 mm 07
15535061001	RAUSILENTO Pipe	DN 40 / 2000 mm 07
15535071001	RAUSILENTO Pipe	DN 40 / 3000 mm 07
15535081001	RAUSILENTO Pipe	DN 50 / 500 mm 07
15535091001	RAUSILENTO Pipe	DN 50 / 1000 mm 07
15535111001	RAUSILENTO Pipe	DN 50 / 1500 mm 07
15535121001	RAUSILENTO Pipe	DN 50 / 2000 mm 07
15535131001	RAUSILENTO Pipe	DN 50 / 3000 mm 07
15535141001	RAUSILENTO Pipe	DN 75 / 500 mm 07
15535161001	RAUSILENTO Pipe	DN 75 / 1000 mm 07
15535171001	RAUSILENTO Pipe	DN 75 / 1500 mm 07

Mat.-no.	Description	Page
15535181001	RAUSILENTO Pipe	07
15535191001	RAUSILENTO Pipe	07
15535201001	RAUSILENTO Pipe	07
15535211001	RAUSILENTO Pipe	07
15535221001	RAUSILENTO Pipe	07
15535231001	RAUSILENTO Pipe	07
15535241001	RAUSILENTO Pipe	07
15535301001	RAUSILENTO Pipe	08
15535311001	RAUSILENTO Pipe	08
15535321001	RAUSILENTO Pipe	08
15535331001	RAUSILENTO Pipe	08
15535341001	RAUSILENTO Pipe	08
15535351001	RAUSILENTO Pipe	08
15535361001	RAUSILENTO Pipe	08
15535371001	RAUSILENTO Pipe	08
15562231001	RAUSILENTO Pipe	08
15562241001	RAUSILENTO Pipe	08
15562251001	RAUSILENTO Pipe	08
15562261001	RAUSILENTO Pipe	08
15562271001	RAUSILENTO Pipe	08
15572011001	RAUSILENTO Pipe	07
15572021001	RAUSILENTO Pipe	07
15572031001	RAUSILENTO Pipe	07
15572041001	RAUSILENTO Pipe	07
15572051001	RAUSILENTO Pipe	07
15572061001	RAUSILENTO Pipe	07
15572071001	RAUSILENTO Pipe	07
15572081001	RAUSILENTO Pipe	07
15572091001	RAUSILENTO Pipe	07
15572101001	RAUSILENTO Pipe	07
15572111001	RAUSILENTO Pipe	08
15572121001	RAUSILENTO Pipe	08
15572131001	RAUSILENTO Pipe	08
15572141001	RAUSILENTO Pipe	08
15572151001	RAUSILENTO Bend	09
15572161001	RAUSILENTO Bend	09
15572171001	RAUSILENTO Bend	09
15572181001	RAUSILENTO Bend	09
15572191001	RAUSILENTO Bend	09
15572201001	RAUSILENTO Bend	09
15572211001	RAUSILENTO Bend	09
15572221001	RAUSILENTO Bend	10
15572231001	RAUSILENTO Bend	09
15572241001	RAUSILENTO Bend	09
15572251001	RAUSILENTO Bend	09
15572261001	RAUSILENTO Bend	09
15572271001	RAUSILENTO Bend	09
15572281001	RAUSILENTO Bend	09
15572291001	RAUSILENTO Bend	09
15572301001	RAUSILENTO Bend	10
15572311001	RAUSILENTO Bend	09
15572321001	RAUSILENTO Bend	09
15572331001	RAUSILENTO Bend	09
15572341001	RAUSILENTO Bend	09
15572351001	RAUSILENTO Bend	09
15572361001	RAUSILENTO Bend	09
15572371001	RAUSILENTO Bend	09
15572381001	RAUSILENTO Bend	10
15572401001	RAUSILENTO Bend	09
15572411001	RAUSILENTO Bend	09
15572421001	RAUSILENTO Bend	09
15572431001	RAUSILENTO Bend	09
15572441001	RAUSILENTO Bend	09
15572451001	RAUSILENTO Bend	10
15572461001	RAUSILENTO Bend	09
15572471001	RAUSILENTO Bend	09
15572481001	RAUSILENTO Bend	09
15572491001	RAUSILENTO Bend	09

Mat.-no.	Description	Page
15572501001	RAUSILENTO Bend	09
15572511001	RAUSILENTO Bend	09
15572521001	RAUSILENTO Bend	10
15572531001	RAUSILENTO Bend	10
15572541001	RAUSILENTO Single branch	11
15572551001	RAUSILENTO Single branch	11
15572561001	RAUSILENTO Single branch	11
15572571001	RAUSILENTO Single branch	11
15572581001	RAUSILENTO Single branch	11
15572591001	RAUSILENTO Single branch	11
15572601001	RAUSILENTO Single branch	11
15572611001	RAUSILENTO Single branch	11
15572621001	RAUSILENTO Single branch	11
15572631001	RAUSILENTO Single branch	11
15572641001	RAUSILENTO Single branch	11
15572651001	RAUSILENTO Single branch	11
15572661001	RAUSILENTO Single branch	11
15572671001	RAUSILENTO Single branch	11
15572681001	RAUSILENTO Single branch	11
15572691001	RAUSILENTO Single branch	11
15572711001	RAUSILENTO Single branch	11
15572721001	RAUSILENTO Single branch	11
15572731001	RAUSILENTO Single branch	11
15572741001	RAUSILENTO Single branch	11
15572751001	RAUSILENTO Single branch	11
15572761001	RAUSILENTO Single branch	11
15572771001	RAUSILENTO Single branch	11
15572781001	RAUSILENTO Single branch	11
15572791001	RAUSILENTO Single branch	11
15572801001	RAUSILENTO Single branch	11
15572811001	RAUSILENTO Single branch	11
15572821001	RAUSILENTO Single branch	11
15572831001	RAUSILENTO Single branch	11
15572841001	RAUSILENTO Single branch	11
15572851001	RAUSILENTO Single branch	11
15572861001	RAUSILENTO Single branch	11
15572881001	RAUSILENTO Single branch	11
15572891001	RAUSILENTO Double branch	12
15572901001	RAUSILENTO Double branch	12
15572911001	RAUSILENTO Corner double branch	12
15572921001	RAUSILENTO Corner double branch	12
15573001001	RAUSILENTO Reducer	13
15573011001	RAUSILENTO Reducer	13
15573021001	RAUSILENTO Reducer	13
15573031001	RAUSILENTO Reducer	13
15573041001	RAUSILENTO Reducer	13
15573051001	RAUSILENTO Reducer	13
15573061001	RAUSILENTO Reducer	13
15573071001	RAUSILENTO Reducer	13
15573081001	RAUSILENTO Reducer	13
15573091001	RAUSILENTO Reducer	13
15573101001	RAUSILENTO Short reducer	13
15573111001	RAUSILENTO Short reducer	13
15573121001	RAUSILENTO Short reducer	13
15573131001	RAUSILENTO Short reducer	13
15573141001	RAUSILENTO Short reducer	13
15573151001	RAUSILENTO Connection pipe	16
15573161001	RAUSILENTO Double socket	14
15573171001	RAUSILENTO Double socket	14
15573181001	RAUSILENTO Double socket	14
15573191001	RAUSILENTO Double socket	14
15573201001	RAUSILENTO Double socket	14
15573211001	RAUSILENTO Double socket	14
15573221001	RAUSILENTO Double socket	14
15573231001	RAUSILENTO Double socket	14
15573241001	RAUSILENTO Slip-on socket	14
15573251001	RAUSILENTO Slip-on socket	14
15573261001	RAUSILENTO Slip-on socket	14

Mat.-no.	Description		Page
15573271001	RAUSILENTO Slip-on socket	DN/OD 75	14
15573281001	RAUSILENTO Slip-on socket	DN/OD 90	14
15573291001	RAUSILENTO Slip-on socket	DN/OD 110	14
15573301001	RAUSILENTO Slip-on socket	DN/OD 125	14
15573311001	RAUSILENTO Slip-on socket	DN/OD 160	14
15573321001	RAUSILENTO Long socket	DN/OD 50	15
15573331001	RAUSILENTO Long socket	DN/OD 75	15
15573341001	RAUSILENTO Long socket	DN/OD 90	15
15573351001	RAUSILENTO Long socket	DN/OD 110	15
15573371001	RAUSILENTO Access pipe	DN/OD 75	15
15573381001	RAUSILENTO Access pipe	DN/OD 90	15
15573391001	RAUSILENTO Access pipe	DN/OD 110	15
15573401001	RAUSILENTO Access pipe	DN/OD 125	15
15573411001	RAUSILENTO Access pipe	DN/OD 160	15
15573421001	RAUSILENTO Con. bend	DN/OD 40 / 40-30	15
15573441001	RAUSILENTO Con. bend	DN/OD 50 / 50	15
15573451001	RAUSILENTO Socket plug	DN/OD 32	16
15573461001	RAUSILENTO Socket plug	DN/OD 40	16
15573471001	RAUSILENTO Socket plug	DN/OD 50	16
15573481001	RAUSILENTO Socket plug	DN/OD 75	16
15573491001	RAUSILENTO Socket plug	DN/OD 90	16
15573501001	RAUSILENTO Socket plug	DN/OD 110	16
15573511001	RAUSILENTO Socket plug	DN/OD 125	16
15573521001	RAUSILENTO Socket plug	DN/OD 160	16
15573531001	RAUSILENTO Con. bend	DN/OD 50 / 40 - 30	15

This document is protected by copyright. The rights conferred thereby, in particular those of translation, reprinting, extraction of illustrations, radio transmissions, reproduction by photo-mechanical or similar means and storage in data processing systems, are reserved..

Our application-related advice, both verbal and written, is based on many years of experience as well as standardised assumptions and is given to the best of our knowledge. The intended use of REHAU products is described conclusively in the technical product information. The currently valid version can be viewed online at www.rehau.com/TI. The application, use and processing of the products are beyond our control

and are therefore the sole responsibility of the respective user/processor. Should liability nevertheless come into question, this shall be governed exclusively by our terms of delivery and payment, which can be viewed at www.rehau.com/conditions, unless otherwise agreed with REHAU in writing. This also applies to any warranty claims, whereby the warranty refers to the consistent quality of our products in accordance with our specification. Subject to technical changes

www.rehau.com

REHAU Industries SE & Co. KG
Ytterbium 4
91058 Erlangen
Germany

556300-25 en 04.2022