RAUKANTEX LITE

UNIQUELY LIGHTED ACCENTS

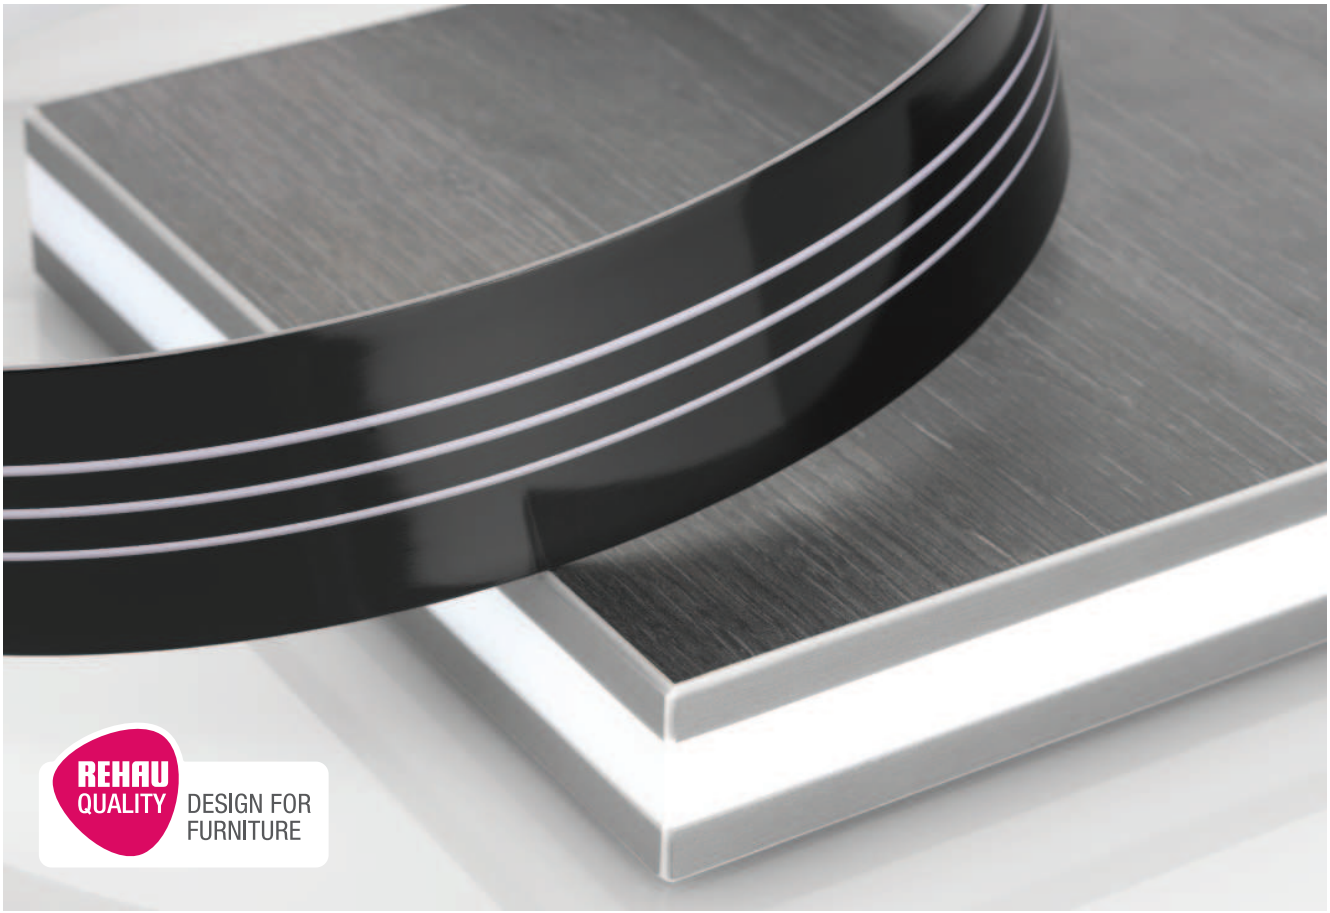

RAUKANTEX lite comes from the product family RAUKANTEX magic 3D. In addition to its conventional application, the edgeband can also be used for backlighting. A cavity 2cm in depth should be routed into a 38 or 50 mm thick particle or MDF board. An LED strip (possibly an RGB strip) is inserted into the cavity. A minimum 8 mm surface layer is required each side for adhesive bonding. The edgeband (with translucent central section) is applied to the board. If using a BAZ, i.e. glue application to the edge, a recessed glue application roller must be used which leaves the central area of the edgeband free of glue. When the LEDs are switched on, light is transmitted through the translucent areas of the edgeband. The application can also be adapted to suit honeycomb boards. Please observe the LED manufacturer's product life and processing instructions as well as the suitability of LEDs for installation into wooden materials. Every counter, every shelf base is transformed into a unique gem with RAUKANTEX life providing a cosy atmosphere thanks to its indirect lighting.

ADVANTAGES:

- Provides opportunity to use lighting to create mood
- Made with high quality transparent material
- Easy to process; no special tools required
- Custom colors are available as non-standard order

REHAU®
Unlimited Polymer Solutions

1 King George's Avenue, #06-00 REHAU Building, Singapore 208557 Tel: +65 6392-6006 Fax: +65 6392-6116
www.rehau.com

MATERIAL: PMMA
LACQUER TYPE: Mirror Gloss
DIMENSION: 45 x 2 mm
54 x 2 mm
AVAILABILITY: From 50 Meters

2235E Lines white-black

2231E Stripe white-stainless steel

2236E Lines blue-black

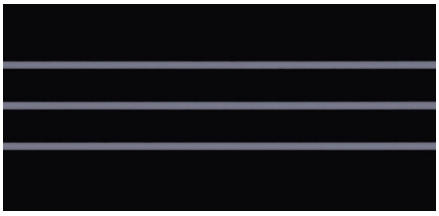

2232E Stripe blue-stainless steel

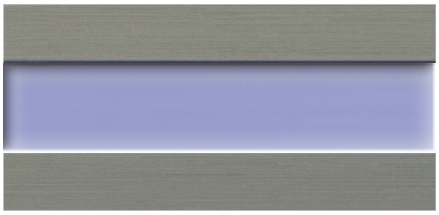

2237E Lines mint-black

2233E Stripe mint-Stainless steel

2238E Zebrano black-white

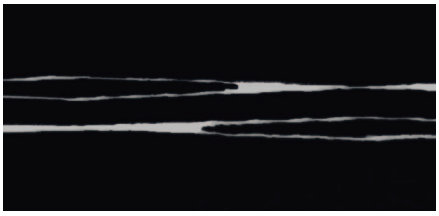

© REHAU AA ML 0026.04.12 EN