


# RAUKANTEX LITE

## UNIQUELY LIGHTED ACCENTS

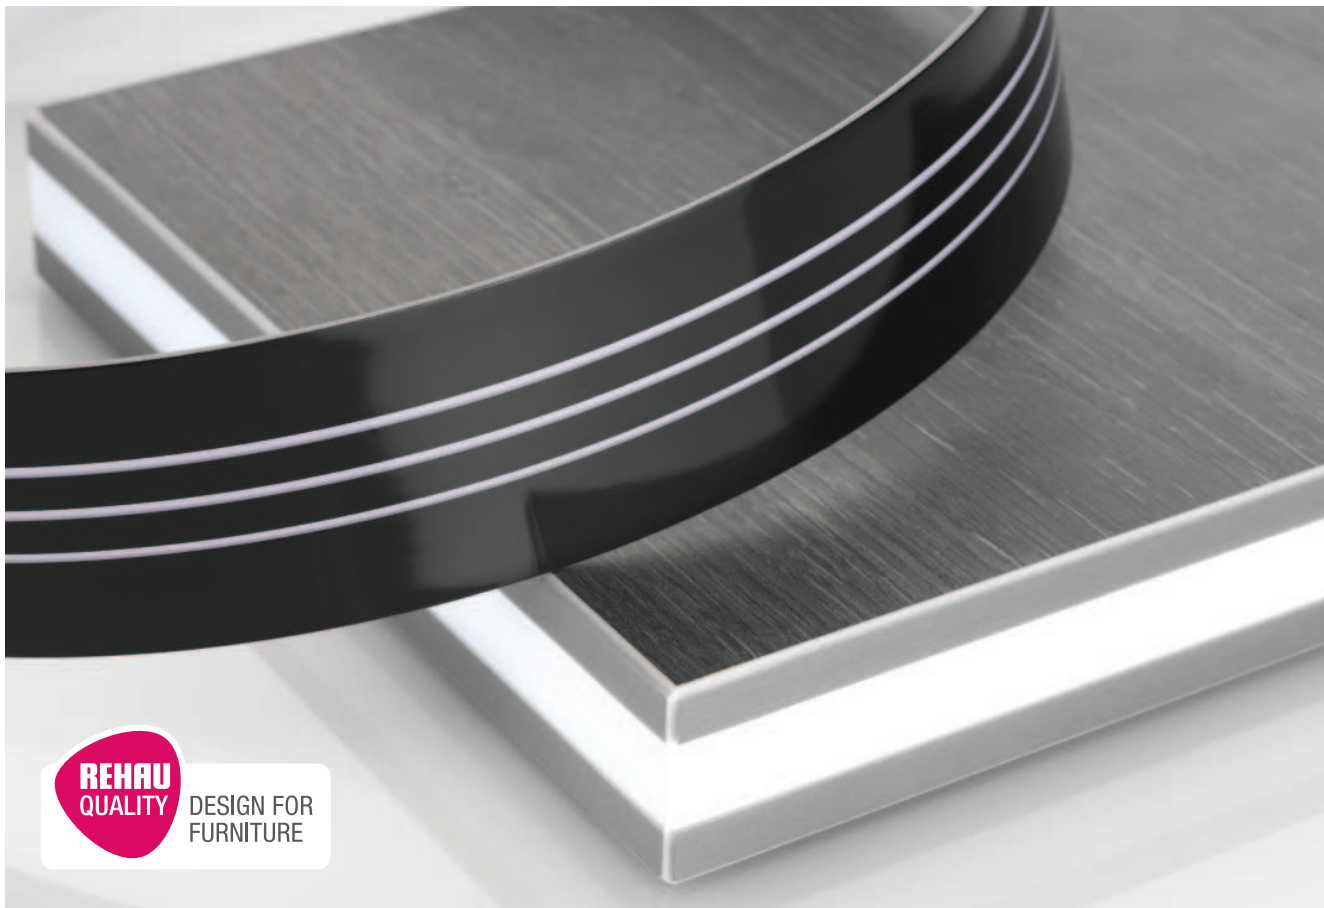

RAUKANTEX lite comes from the product family RAUKANTEX magic 3D. In addition to its conventional application, the edgeband can also be used for backlighting. A cavity 2cm in depth should be routed into a 38 or 50 mm thick particle or MDF board. An LED strip (possibly an RGB strip) is inserted into the cavity. A minimum 8 mm surface layer is required each side for adhesive bonding. The edgeband (with translucent central section) is applied to the board. If using a BAZ, i.e. glue application to the edge, a recessed glue application roller must be used which leaves the central area of the edgeband free of glue. When the LEDs are switched on, light is transmitted through the translucent areas of the edgeband. The application can also be adapted to suit honeycomb boards. Please observe the LED manufacturer's product life and processing instructions as well as the suitability of LEDs for installation into wooden materials. Every counter, every

shelf base is transformed into a unique gem with RAUKANTEX lite providing a cosy atmosphere thanks to its indirect lighting.

#### ADVANTAGES:

- Provides opportunity to use lighting to create mood
- Made with high quality transparent material
- Easy to process; no special tools required
- Custom colors are available as non-standard order

---

**MATERIAL:** PMMA  
**LACQUER TYPE:** Mirror Gloss  
**DIMENSION:** 45 x 2 mm  
54 x 2 mm  
**AVAILABILITY:** From 50 Meters

2235E Lines white-black




2231E Stripe white-stainless steel



2236E Lines blue-black



2232E Stripe blue-stainless steel

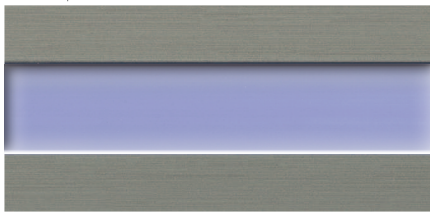

2237E Lines mint-black



2233E Stripe mint-Stainless steel



2238E Zebrano black-white

