


# PRODUCT SUBMITTAL 1301

## EVERLOC+® Tub/Shower Valve Ells



**Product:** EVERLOC+® Tub/Shower Valve Ells

**Date:** 17 April 2024 (supersedes 01 August 2017)

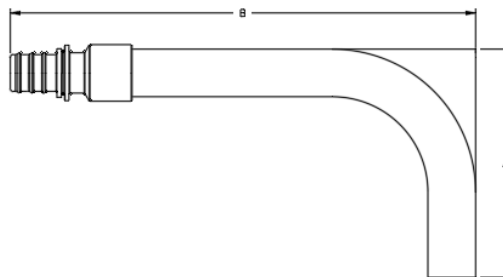

Article No.	Nominal Size in	A in (mm)	B in (mm)
418664-001	1/2 x 1/2 Copper Tube	3.00 (76.2)	6.15 (156.2)

### TECHNICAL DESCRIPTION

Specification	ASTM F877 / CSA B137.5 / ASTM B88
Material	ECO BRASS® (C69300 or CW724R) / Copper Alloy C12200 Type L
Certifications	cNSFus-pw

### FUNCTIONAL DESCRIPTION

EVERLOC+ tub/shower diverter ells with EVERLOC+ compression-sleeve fittings and sleeves are designed specifically for use with REHAU PEXa pipe to create a reliable connection that can be walled in. The maximum temperature and pressure ratings of the EVERLOC+ compression-sleeve fitting system is in accordance with ASTM F877 and CSA B137.5 for SDR9 PEX, see REHAU pipe product submittals for ratings. Installation is performed with EVERLOC+ compression-sleeve tools. Follow all published *REHAU Technical Guidelines*. All EVERLOC+ fittings and sleeves comply with the lead-free (LF) requirements of the U.S. Safe Drinking Water Act.

For updates to this publication, visit [na.rehau.com/resourcecenter](http://na.rehau.com/resourcecenter)

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.  
© 2024 REHAU